




**CLEON**  
Power Your World

# AUTOMOTIVE POWER

## APPLICATION

- ▶ PASSENGER VEHICLES
- ▶ COMMERCIAL VEHICLES
- ▶ RECREATIONAL VEHICLES
- ▶ DEEP CYCLE PURPOSE
- ▶ START-STOP TECHNOLOGY

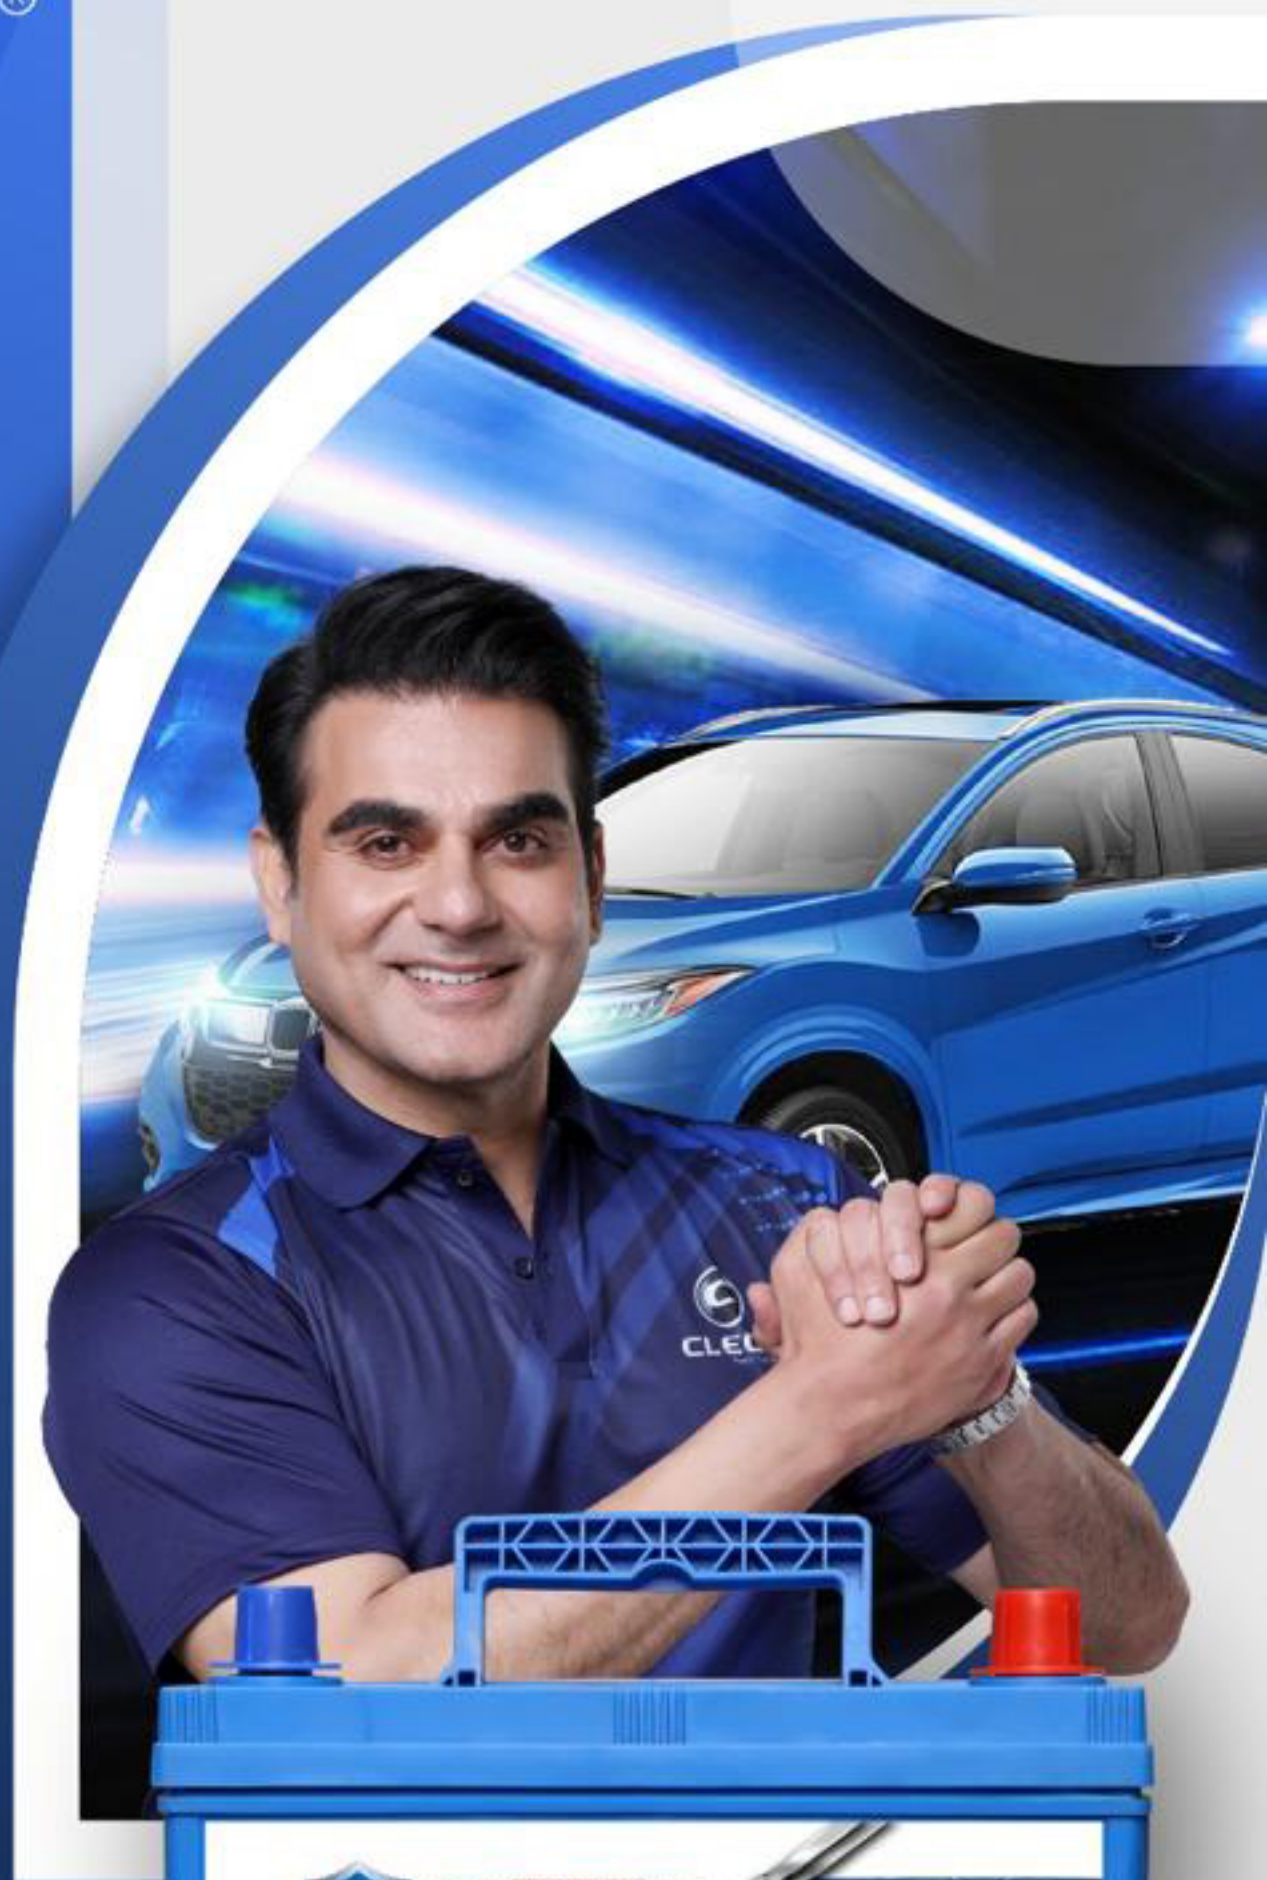

Easy Carry Handle



Built-in Magic Eye



Factory Sealed



Special PE Separator



Ca-Sn-Ag Alloy



Specially Designed Polypropylene Case



Lower Energy Consumption



Cold Forged Bush

## PRODUCT FEATURES:

- Good cranking power and better life expectancy .
- Special Calcium Tin Alloy Used to minimize corrosion.
- Low electric resistance PE separators used
- Magic eye to indicate battery charging state.
- Compact element design ensures battery to withstand high vibration in application.
- Cleon automotive battery follows IS, JIS and DIN standard.



## TECHNICAL DATA

MODEL RANGE								
Maintenance Free Automotive Battery								
Battery Type		AH	MOQ (1 Pallet)	DIMENSIONS			CCA	Filled Weight
Container	OLD JIS/ DIN Part Number	@20HR	Pcs	L	W	TH	(SAE)	KG
<b>Passenger Car - JIS</b>								
NS40/ B20	36B20R/L	32	128	197	129	225	340	8.6
	44B20R/L	35	128	197	129	225	350	9.2
NS60/ B24	50B24R/L (S/LS)	40	108	238	129	225	380	10.9
	55B24R/L (S/LS)	45	108	238	129	225	440	11.5
55D23/ D23	65D23R/L	60	80	230	173	225	550	14.6
NS0/ D26	55D26R/L	50	72	259	173	225	460	15.4
	65D26R/L	60	72	259	173	225	540	15.6
	80D26R/L	65	72	259	173	225	600	16.8
	85D26R/L	70	72	259	173	225	650	17.1
N70/ D31	85D31R/L	70	68	306	173	225	650	18.4
	95D31R/L	75	68	306	173	225	700	19.2
	105D31R/L	80	68	306	173	225	750	19.9
<b>Commercial Vehicle - JIS</b>								
N100/ E41	115E41R/L	100	36	410	173	233	700	23.9
N120/ F51	135F51R/L	120	27	506	182	222	850	29.5
N150/ G51	165G51R/L	150	24	506	221	222	1000	38.0
	190G51R/L	170	24	506	221	246	1050	39.7
N200/ H52	195H52R/L	180	18	518	274	248	1100	47.0
	210H52R/L	200	18	518	274	226	1200	47.4
<b>Passenger Car - DIN</b>								
LB1	54321 - LBN	43	92	207	175	175	400	11.0
L1	54434	44	92	207	175	190	400	11.7
L1	55054	50	92	207	175	190	420	11.9
L2	55530	55	80	242	175	190	500	14.0
L2	56030	60	80	242	175	190	540	15.1
LB3	56628 - LBN	66	72	278	175	175	600	15.3
L3	56618	66	72	278	175	190	620	16.2
L3	57512	75	72	278	175	190	720	17.6
LB4	58014 - LBN	80	60	315	175	175	740	17.7
L4	58043	80	60	315	175	190	750	19.3
LB5	58820	90	48	353	175	175	780	20.1
L5	58815	90	48	353	175	190	800	20.6
L5	60038	100	48	353	175	190	875	21.7

Packing: Standard Export Packing. Individual batteries in cartons, packed together in Pallet  
 Alloy: Calcium-Silver (ZERO MAINTENANCE BATTERIES)

Plot No 7- A, Sector - III, Vaishali, Ghaziabad, U.P - 201010, ( INDIA )

Office No 27, 31<sup>st</sup> Floor, API World Tower, Sheikh Zayed Road  
 Dubai (UAE), Near Conrad Hotel

Email: [export@cleonpowertech.in](mailto:export@cleonpowertech.in), [cleonpowertech@gmail.com](mailto:cleonpowertech@gmail.com)

Website: [www.cleonglobal.com](http://www.cleonglobal.com)

Customer Care No: +91- 9410077777, +971- 509141365